
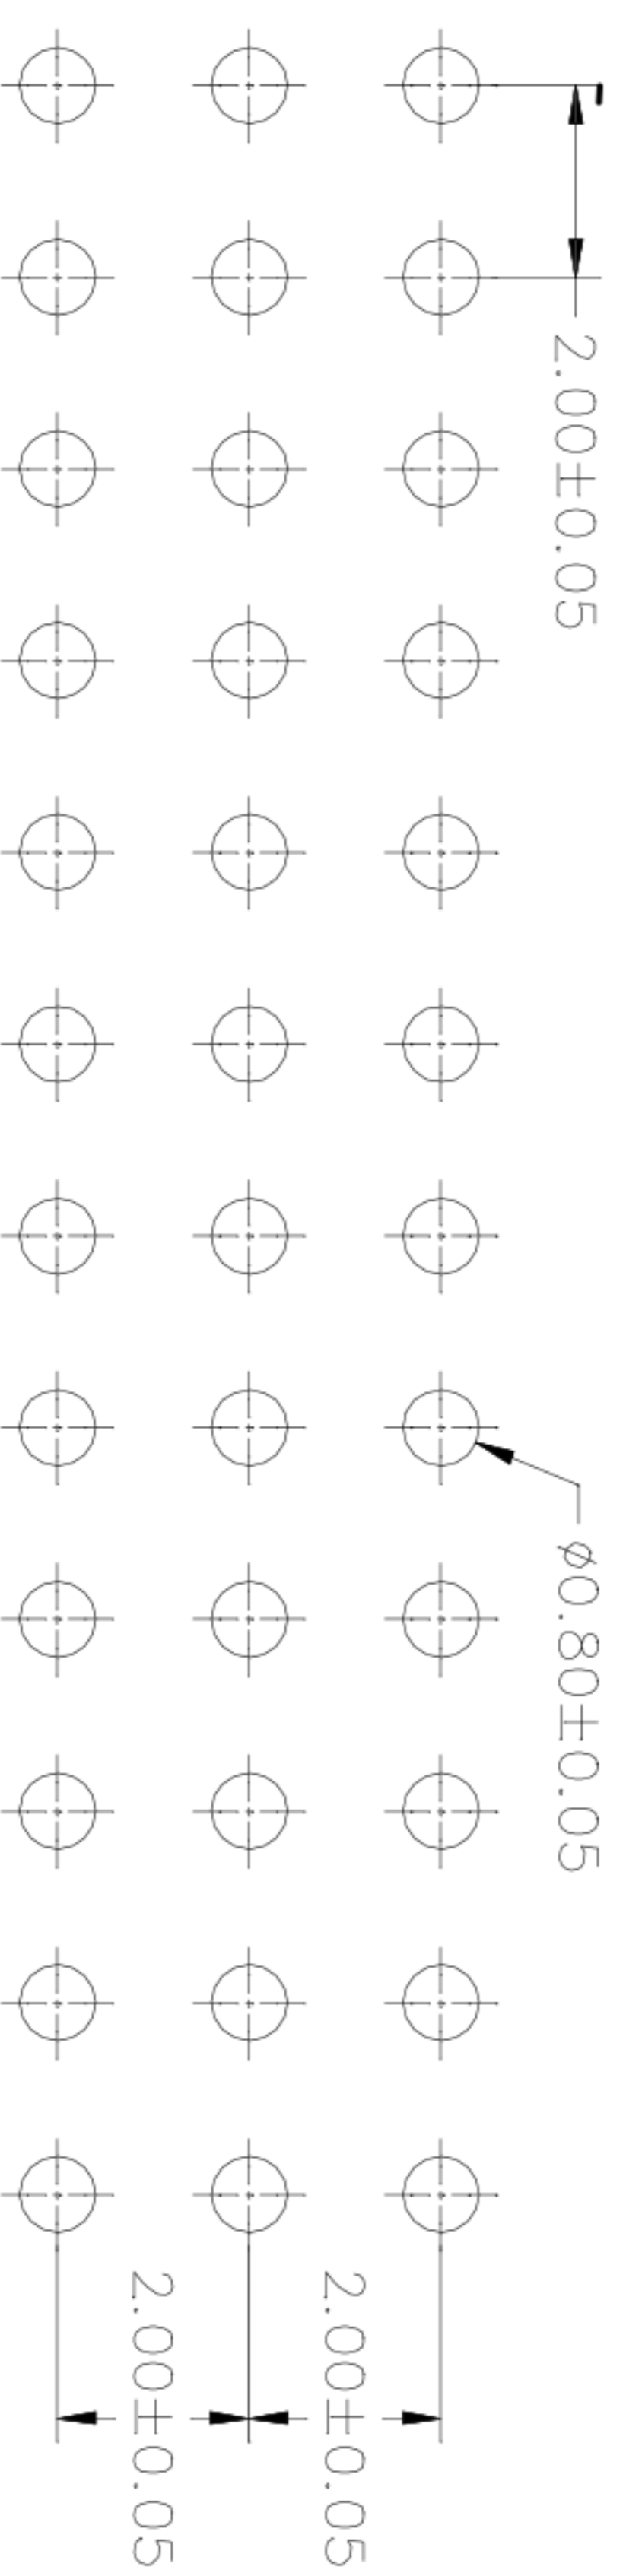


2.00*2.00mm (0.079"*0.079") FEMALE HEADER, Triple row, STRAIGHT
 H=6.35mm

SPECIFICATIONS

Current Rating: 1.5AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C
 Contact: Brass
 plating: Au or Sn Over 50u" Ni
 Insulator: High Temperature Thermoplastic
 UL94V-0 Rated
 Standard: PA9T+ 30%G.F

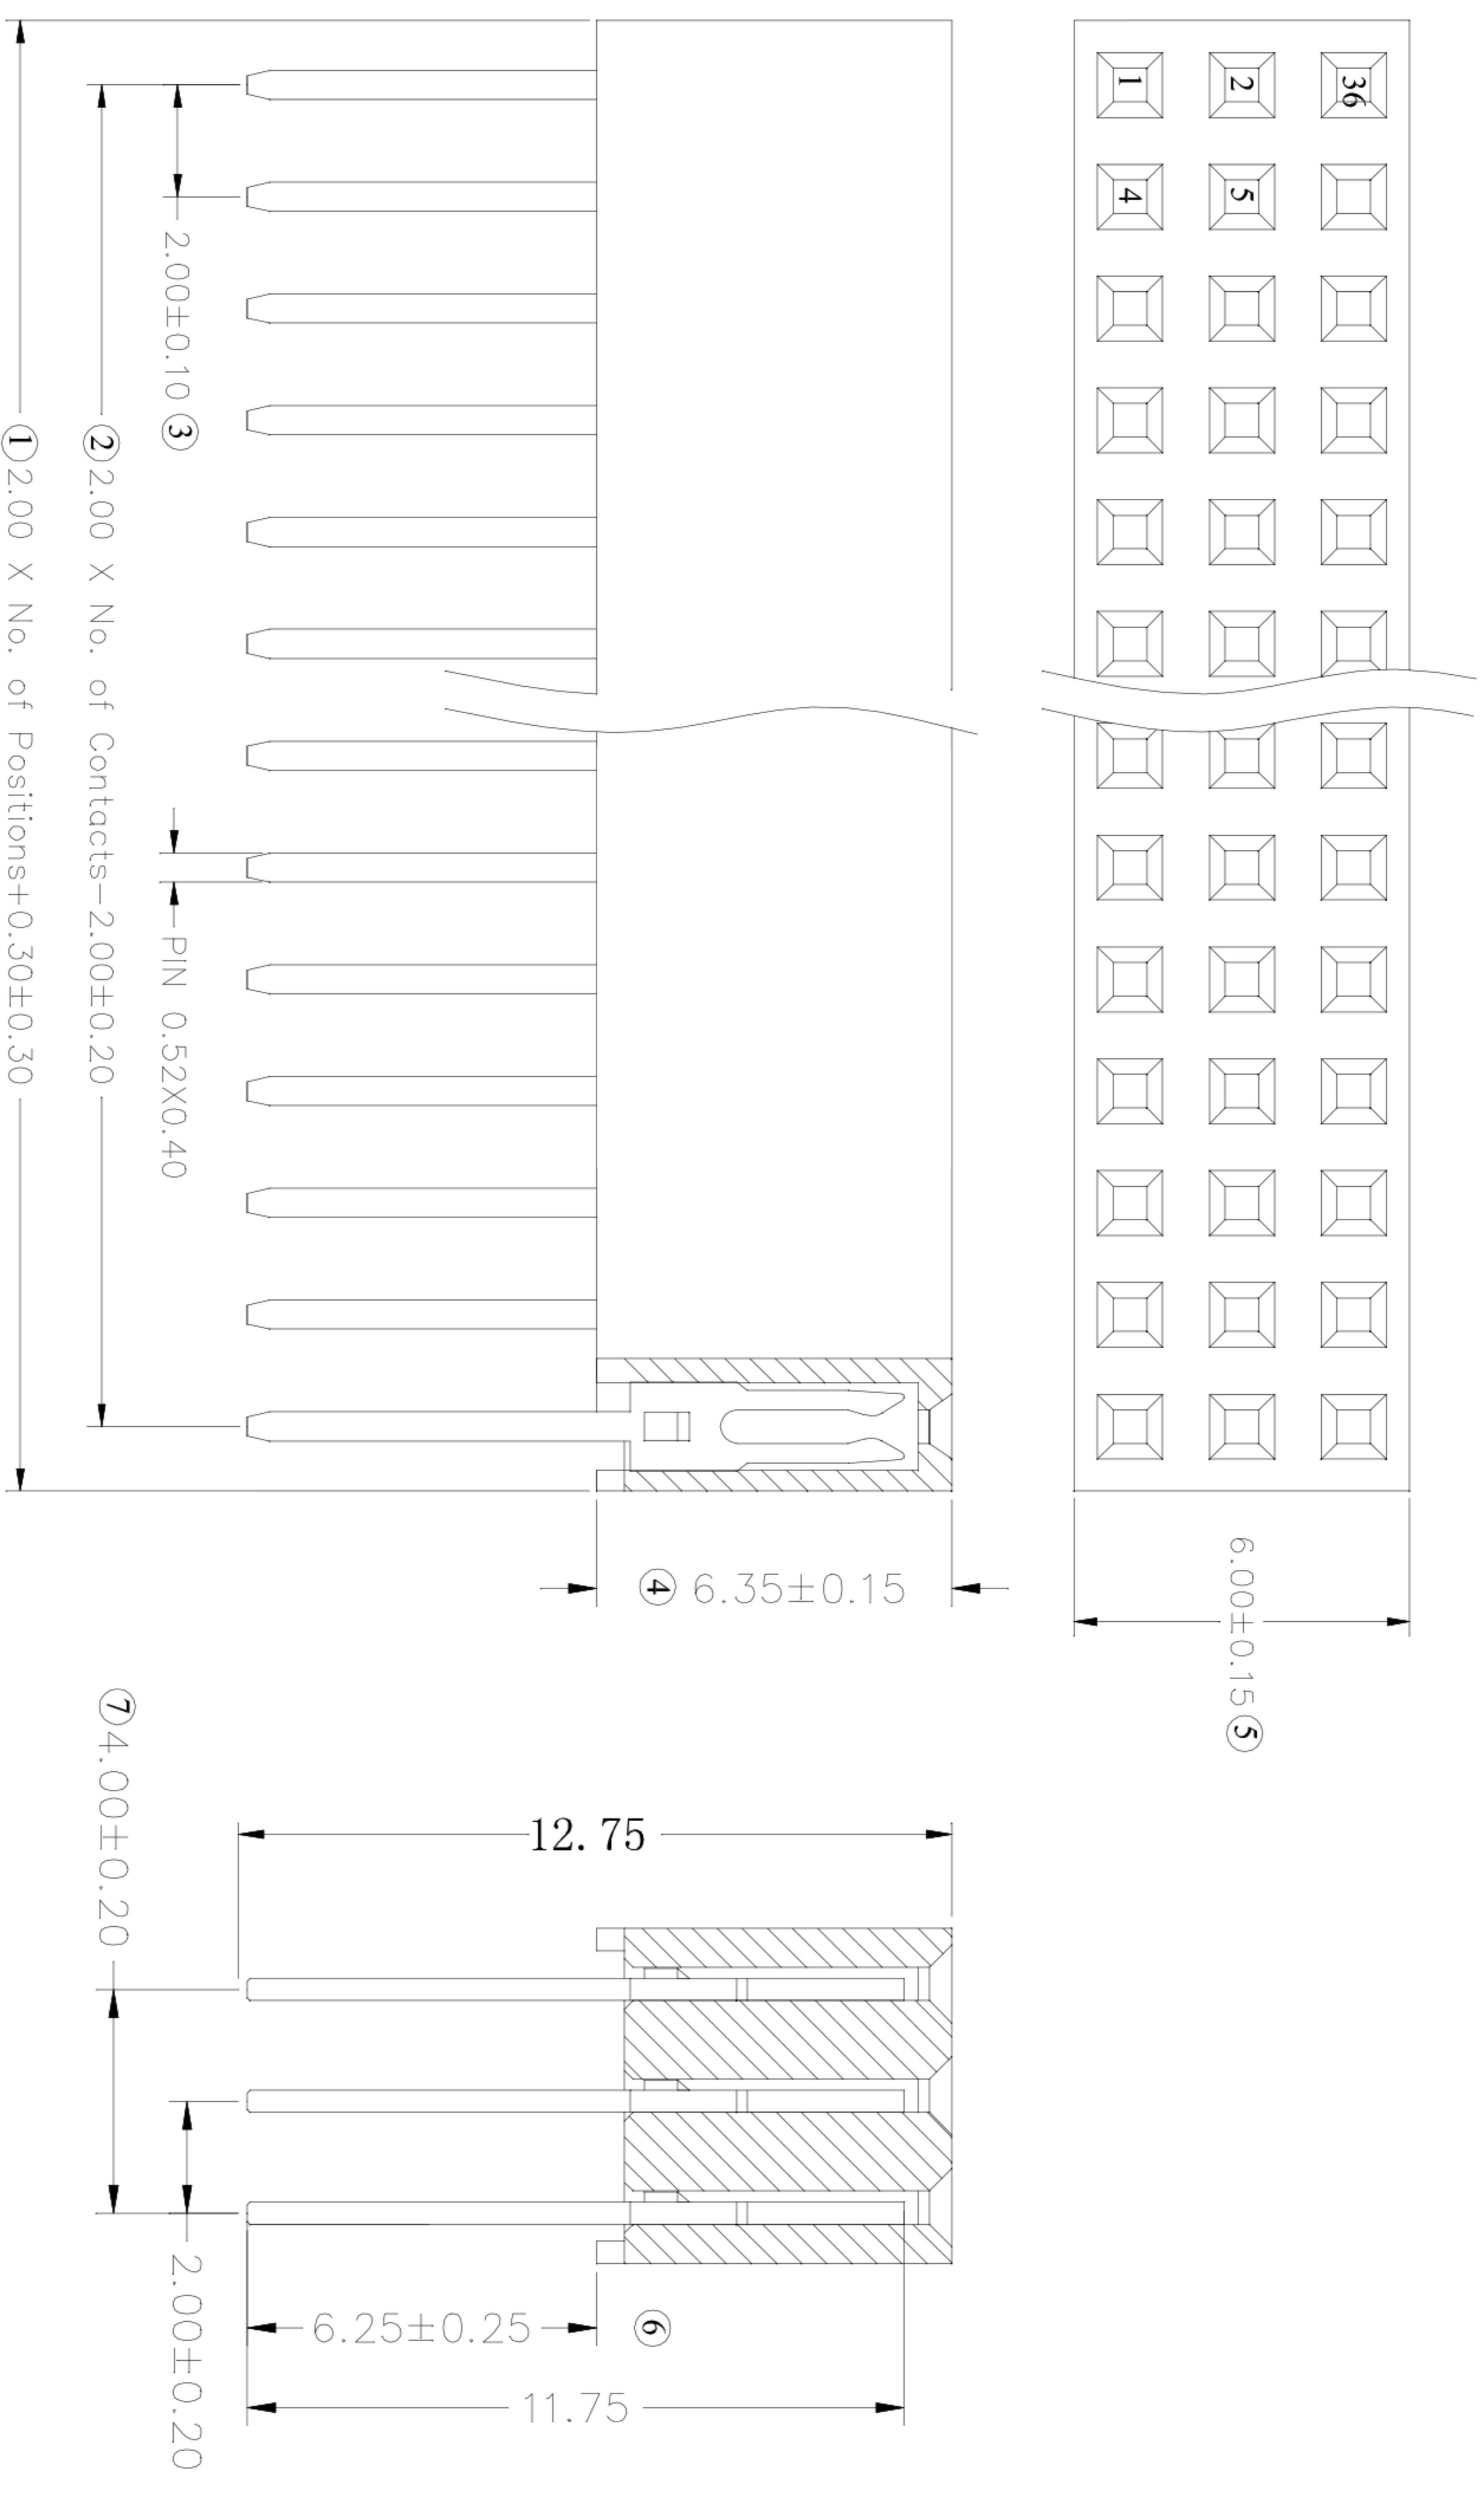

Recommended PCB Layout

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	2.00mm Crimp Style Connector	
CHECKED			PART NO.	GP25-2021WV-3XNP
APPROVALS			UNIT: mm	SCALE: 1:1
TOLERANCES ARE		30~以上 ±0.30	ANGLE	±2°
		10~30 ±0.20	DRAWING NO.	
		5~10 ±0.15		
		~ 5 ±0.10		



深圳市联丰电子有限公司
 SHENZHEN LIANFENG ELECTRONIC CO.,LTD